

# Sinexcel

Everything about profitability  
and charging experience

## SEC 80kW Series DC Fast Charger




## Overview

The SEC 80kW is an integrated DC fast charger that features high efficiency and flexible configured. It supports the CCS & JAP & Type 2 triple connector charging at the same time and adopts compact design, with a smaller area covered.

The Charger used in centralized fast charging station, it adopts 20kW charging power module of Sinexcel, and meet the charging demand of larger capacity and high endurance electric on the market.

## Dimensions

**W850\*D450\*H2030mm**

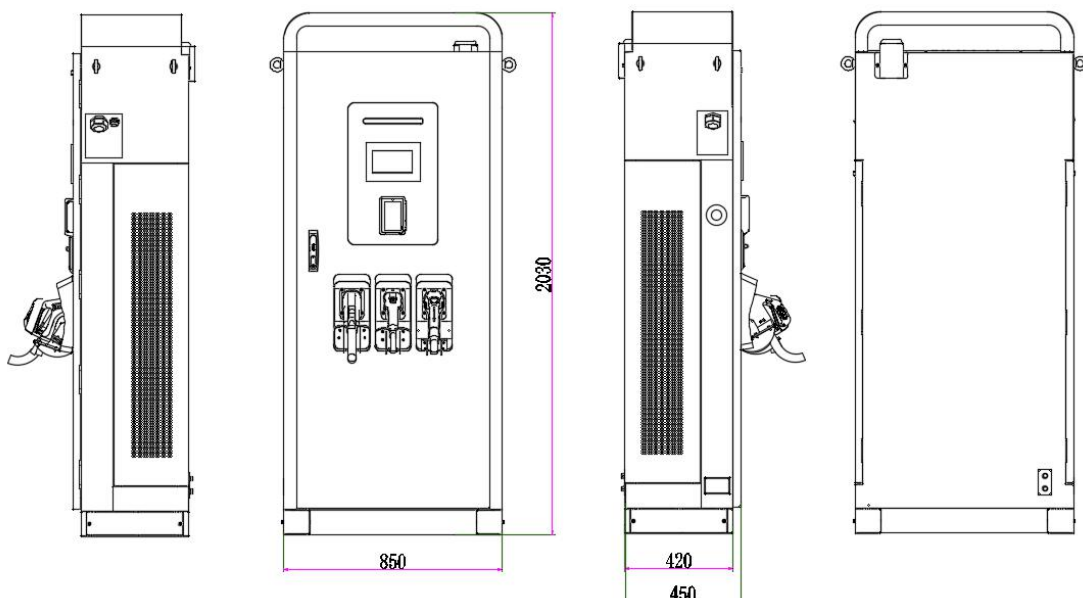

# Specifications

| 80kW Integrated Charger |                           |  |
|-------------------------|---------------------------|--|
| Input Characteristic    | Input voltage             | 400 VAC +/- 10%  |
|                         | Input frequency           | 50 Hz/ 60 Hz   |
|                         | Input type                | 3P + N + PE  |
|                         | Input current             | 182 A  |
|                         | Input power               | 110kVA   |
|                         | Power factor              | 0.99   |
|                         | THDi                      | <5%  |
|                         | Grounding type            | TN-S, TN-CS  |
| Output Characteristic   | Connector options         | CCS2<br>CCS2+CCS2<br>CCS2+CHAdEMO<br>CCS2+CHAdEMO+Type2<br>CCS2+CCS2+Type2   |
|                         | Output voltage            | CCS2: 200-1000 Vdc<br>CHAdEMO: 200-500 Vdc<br>Type 2: 400 Vac +/- 10%<br>300~1000V is the output voltage of constant power output. |
|                         | Maximum output current    | CCS2: 200A<br>CHAdEMO: 125A<br>Type 2: 32A   |
|                         | Rated power               | DC: 80kW<br>AC: 22kW   |
|                         | Peak efficiency           | 96%  |
| Environment             | Operational altitude      | <2000 m  |
|                         | Operating temperature     | -25 °C to +50 °C (Full power)  |
|                         | Temperature derating      | Up to 50 °C, 100% output power; 50-65 °C interval, linear power limit; 65 °C or more, module shutdown protection                   |
|                         | Storage temperature range | -30 °C to +70 °C   |
|                         | Humidity                  | 5 %-95 % Rh non-condensing   |
| Structure               | IP and IK rating          | IP55/ IK10   |
|                         | Dimensions                | W850*D450*H2030mm  |
|                         | Weight                    | ≤300 kg  |
|                         | Enclosure material        | 304 stainless steel  |
| Components              | Cable length              | 5 m (total, outside charger 4.5m)  |
|                         | Screen                    | 7" HD high-contrast touchscreen  |
|                         | RFID Reader               | ISO 14443 A + B to part 4 and ISO/IEC 15693, Mifare1, NFC  |
|                         | Emergency button          | Yes  |
|                         | Communication interface   | 4G / LAN Port  |

|                                     |                        |   |
|-------------------------------------|------------------------|---|
| <b>Others</b>                       | Language               | English (Support customizing other languages)   |
|                                     | Communication protocol | OCP1.6J   |
|                                     | Cooling method         | Air cooled  |
|                                     | Payment method         | RFID / APP<br>(Mobile phone / Visa / Master is optional)  |
|                                     | EMC                    | Class A (industrial)  |
|                                     | Protection             | Undervoltage protection, Overvoltage protection, DC Overcurrent protection, Over-temperature protection, Surge Protection Device, Emergency Stop Protection |
|                                     | Optional functions     | Tilt detection, flood detection, smoke detection  |
| <b>Standards and Certifications</b> | Standards              | IEC 61851, IEC 62196, DIN 70121, ISO 15118, etc.  |
|                                     | Certifications         | CE, TUV, TR25, UKCA, RCM  |

Shenzhen Sinexcel Electric Co.,Ltd.

<https://en.sinexcel.com/>

Address: 6<sup>th</sup> Building, 2<sup>nd</sup> District, Baiwangxin High-tech Industry Park, Songbai Road, Nanshan District, Shenzhen.

© Sinexcel 2022. All rights reserved.

**Sinexcel**

Everything about profitability  
and charging experience